


ALP2200/AN

Information LED Panel for Rolling Stock

- Display area (1072 × 184) mm, yellow LED
- Resolution 135 × 24 pixels
- RS485 communication interface
- Power supply 24 V DC
- Fulfill UIC176 requirements
- Designed in accordance with EN 50155

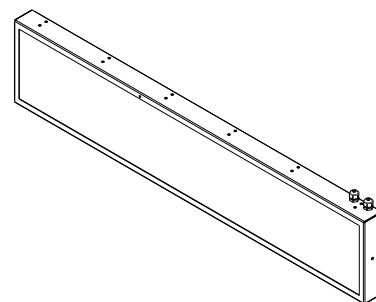

TECHNICAL DATA

Display area	(1072 × 184) mm
Resolution	135 × 24 pixels
LED pitch	8 mm
LED colour	Yellow, 590 nm typ.
Brightness	Min. 800 cd/m2
Observation angel	120 ° *)
Light sensor	1 ×
Function	Measuring of ambient light
RS485	1 ×
Galvanic separation, insulation strength	Yes, 500 V AC/1 minute **)
Connection	WAGO231-636/019-000 #)
Geographical addressing	Separate cable
Number of bits	4
Connection	WAGO231-635/019-000
Power supply	24 V DC -30 % to +25 %
Max. power consumption	5 A at 24 V DC
Peak input current	10 A ##)
Connection	WAGO231-636/019-000 #)
Others	
Mechanic	Sheet metal cover + polycarbonate
Colour of mechanic	Grey
Mounting	4 × M6 screw from the side
Cover protection rate	IP50
Operating temperature	-40 °C to 70 °C
Storage temperature	-40 °C to 70 °C
Max. ambient humidity	< 95 % non-condensing
Weight	9 kg
Dimensions (w × h × d)	(1111 × 249 × 61) mm
Expected MTBF	> 50 000 h

*) Decline in brightness from the line of observation angle to 50 %.

**) Galvanic separation may not be used for unsafe voltage separation.


#) Power supply and RS485 communication are on common connector.

##) Duration time of peak input current is less then 5 ms.

ORDERING INFORMATION

ALP2200/A	LED panel, WAGO connector counterparts, certificate of product quality and completeness, routine test report, insulation test report
-----------	--



RECOMMENDED DRAWING SYMBOL

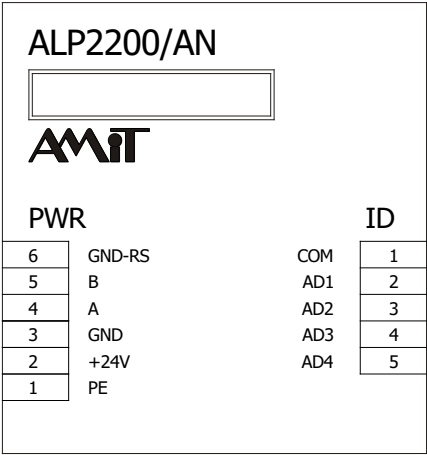

TERMINALS ASSIGNMENT

Connector	PIN	Signal	Description
PWR	1	PE	Unit frame
	2	+24V	Power supply, +24 V
	3	GND	Power supply, GND
	4	A	RS485, A line
	5	B	RS485, B line
	6	GND-RS	RS485, ground

Connector	PIN	Signal	Description
ID	1	COM	Common address pin
	2	AD1	Address pin 1
	3	AD2	Address pin 2
	4	AD3	Address pin 3
	5	AD4	Address pin 4



PANEL DIMENSIONS AND CONNECTORS LOCATION

All dimensions are in mm. PWR and ID connectors are lead out of the information LED panel by 1 m length cables.

